

Ebsoft delivers labels made out of paper and PE (British standard certification). You can select following sizes:

Immediately available (no additional tooling costs). You can also order small portions.

White matt PE LASER, white matt PAPER. For sizes watch following list.

Surface protection: Resistance to UV and weather-proofed labels, even by using toner, ink or thermotransfer tape. The printed labels will stick permanently, even on rough surfaces.


Size - sheet	Size: Labels (mm)	Value
DIN A4	100 x 280	2 labels
DIN A4	48 x 200	6 labels
DIN A4	40 x 143	10 labels
DIN A4	18 x 104	32 labels
DIN A4	36 x 104	16 labels
DIN A4	74 x 105	8 labels
DIN A4	105 x 148	4 labels
DIN A4	146 x 208	2 labels
DIN A4	2 x 105 x 74 ; 2 x 105 x 18	4 labels
DIN A4	208 x 295	1 labels
DIN A4	208 x 147,5	2 labels
DIN A4	208 x 295	1 labels
DIN A4	104 x 147,5	4 labels
DIN A4	60 x 40	21 labels
DIN A5	146 x 208	1 label
DIN A5	104 x 146	2 labels
DIN A5	52 x 146	4 labels
DIN A5	104 x 146	2 labels
DIN A6	1 x 74 x 58 ; 2 x 74 x 35	3 labels
DIN A6	75 x 146	1 label
LEGAL 7	213 x 176,5	1 label
LEGAL 14	2 x 105 x 74 ; 2 x 105 x 36	4 labels
LEGAL 14	213 x 353	1 label
LEGAL 14	213 x 353	1 label
105x297	90 x 103	3 labels
148x297	30 x 108	9 labels
148x355	146 x 353	1 label
DIN C5	210 x 148	1 label
DIN C5	148 x 105	2 labels
DIN C5	105 x 74	4 labels
DIN C5	74 x 52,5	8 labels
DIN C5	52,5 x 37	16 labels

PE-material got the british standard certification, sect. 3.

Labels on a role: DIN A4, DIN A5, DIN A6 off the shelf.

**Price list: A4 labels for GHS printing:**

material: **PE Laser**  
 Price per hundred : **On enquiry**  
 Size: **A4 sheet (297 x 210 mm) with different tear-off lines (a,b,c,d,e)**  
 Safety rim: **2 mm, circular**  
 Certification: **BS5609**  
 Characteristics: **UV-Primer, UV resistance, glue permanently adhesive, BS 5609 certification**

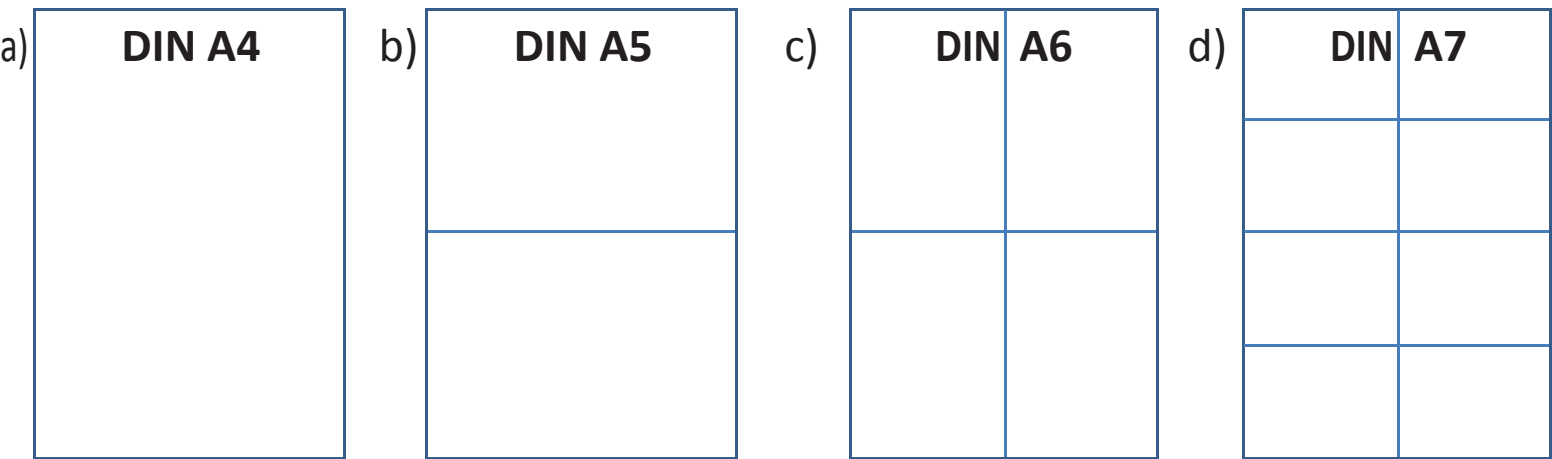

**Description: Material - LASER PE with special glue**

**-BS 5609 certification, section 2**

**-(saltwater-proof)-  
Top material**

White and matt PE LASER-UV primer  
 Non-smudge and water-proofed toner-  
 Weight 105 g/qm ISO 536  
 Thickness μ 0,180 mm ISO 534

**Adhesive :**  
 Permanent adhesive acryl glue for  
 Rough surface like HDPE Drums etc,  
 UV-resistance.

Lifting force 700 N/m FTM 9 glass  
 Sound 320 N/m FTM 2 st.st.  
 Heat max.: +100°C  
 Coldness max.: -40°C

**Silicone liner**  
 One-sided silicone kraft paper  
 Weight 80 gr/qm  
 Thickness 0,084 mm

**BS 5609 certification, section 2, (saltwater-proof).**

**BS 5609 testing is a requirement for self-adhesive drum labels needing International Maritime Dangerous Goods (IMDG) certification. Testing includes a 3 month exposure of labelled test plates in salt water at mid-tide.**

**Ebsoft – New Solution**

If you print labels with the recommended material:

- Special labels:
- PE-material with surface protection, highly adhesive Acryl glue,
- A very fast coloured print: DIN 4, DIN A3

**both labels got the**

**BRITISH STANDARD BS5609, SECTION 3**

**PIRA REF:10E11TIJ00093**





a)DIN A4	210 x 297 mm
b) DIN A5	148 x 210 mm
c) DIN A6	105 x 148 mm
d) DIN A7	74 x 105 mm
e) DIN A8	52 x 74 mm

**Shippable Off-the-shelf!**

## Label price list: Legal sizes for GHS marking






material: **PE Laser**  
 Preis pro hundert : **on enquiry**  
 Size: Legal sheet ( 356 x 216 mm) with different tear-off lines (a,b,c,d,e)  
 Safety rim: 1 mm, circular  
 Certification: BS5609  
 Eigenschaften: UV-Primer, UV resistance, highly/permanently adhesive glue  
 BS5609 certificated  
 (saltwater-proof)

### Legal

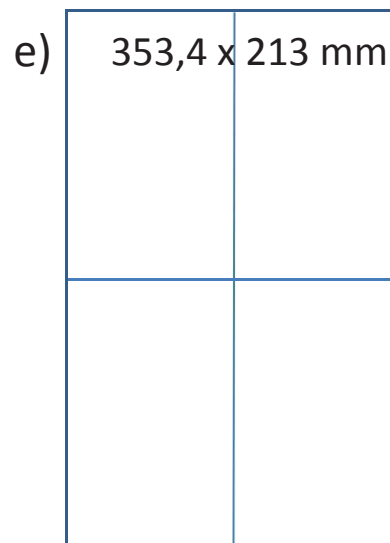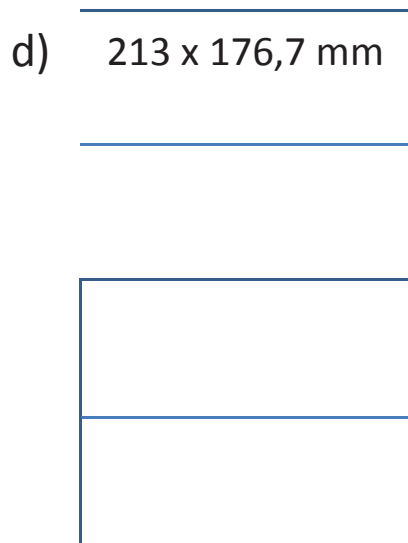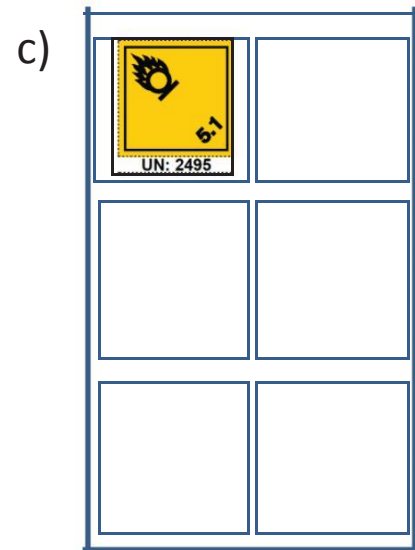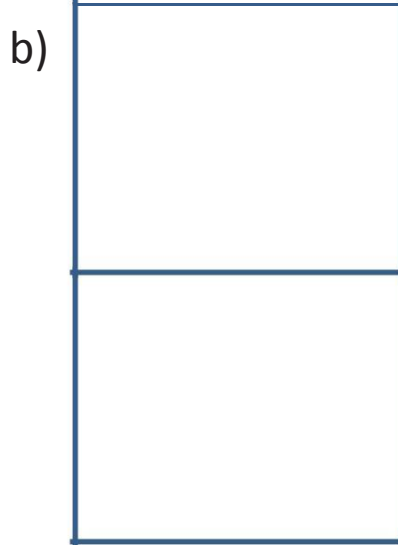

All prices without vat

material: **Paper**  
Price per hundred : **On enquiry**  
Size: A4 sheet (297 x 210 mm) with different tear-off lines (a,b,c,d,e)  
Safety rim: 1 mm, circular  
Eigenschaften: UV-Primer, UV resistance, highly/permanently adhesive glue

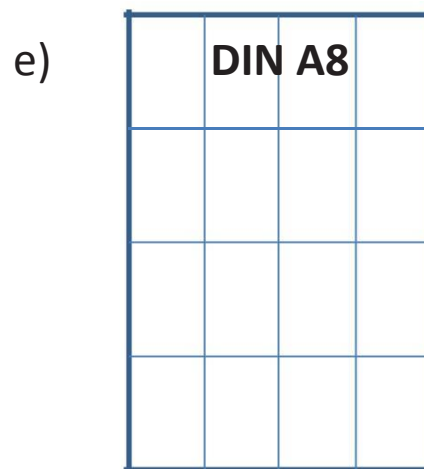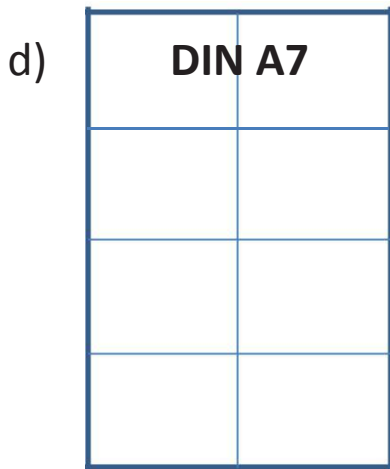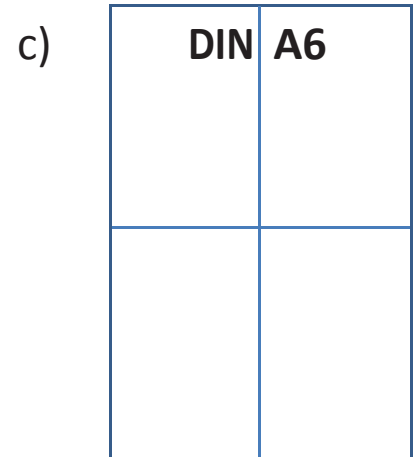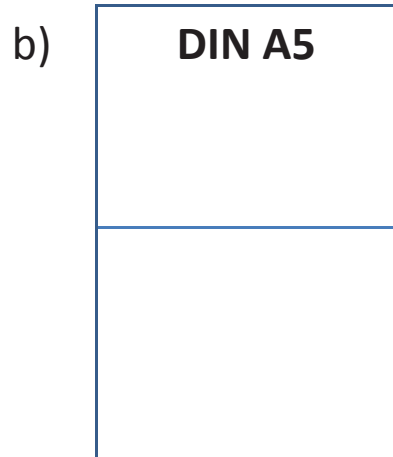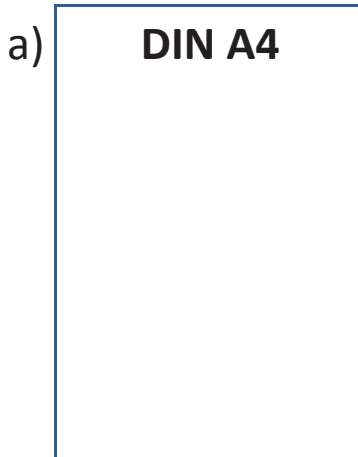

a) DIN A4	210 x 297 mm
b) DIN A5	148 x 210 mm
c) DIN A6	105 x 148 mm
d) DIN A7	74 x 105 mm
e) DIN A8	52 x 74 mm

**Shippable off the shelf!**

**Description: Material - LASER - PAPER with special glue**

**Top material**

White matt Paper LASER-UV primer,  
**non-smudge**

Weight 70 g/qm ISO 536  
Thickness  $\mu$  0,078mm ISO 534

**Glue**

Highly/permanent adhesive acryl glue, even on rough  
surface like - HDPE Drums etc,  
UV-resistance.

Lifting force 700 N/m FTM 9 glass  
Schalfestigkeit 320 N/m FTM 2 st.st.  
Temperature max.: +150 °  
Temperature min.: -40°

**Silicone material**

White, one-sided kraft paper  
Weight 60 gr/qm  
Thickness 0,058 mm